




**TOP VIEW**  
SCALE 1:50

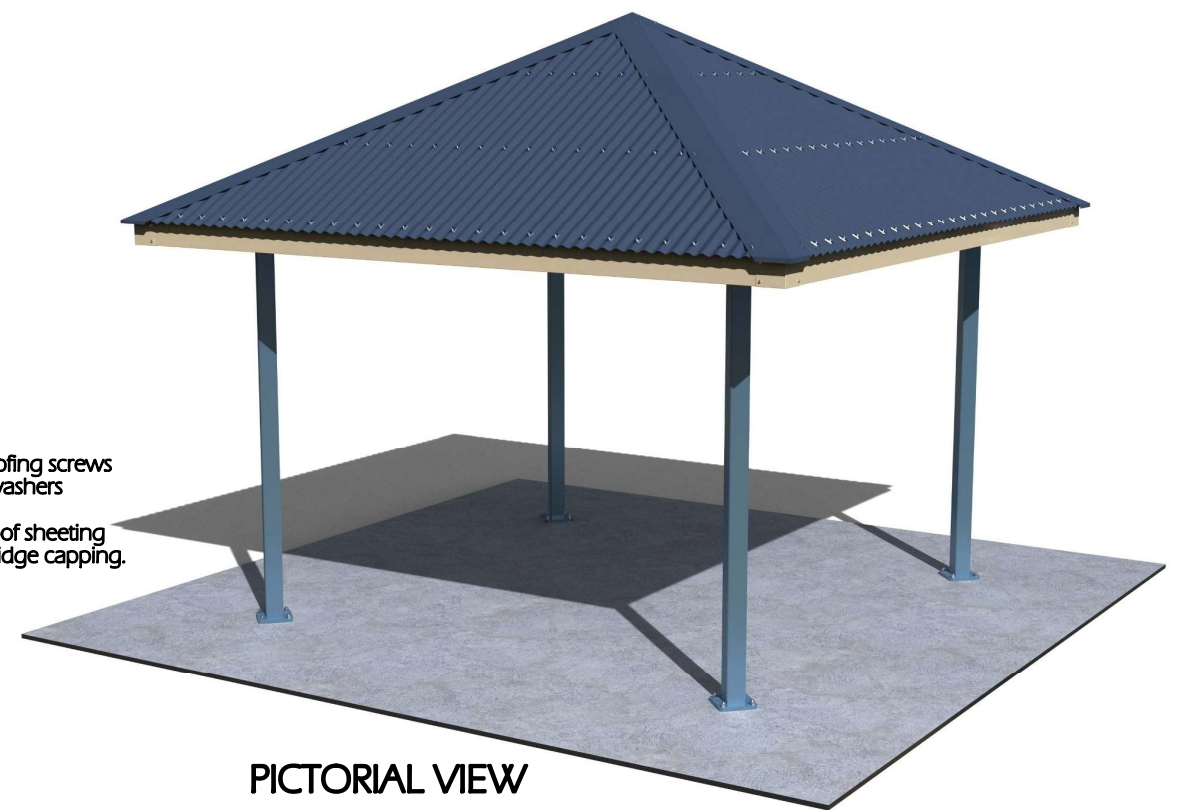

**PICTORIAL VIEW**

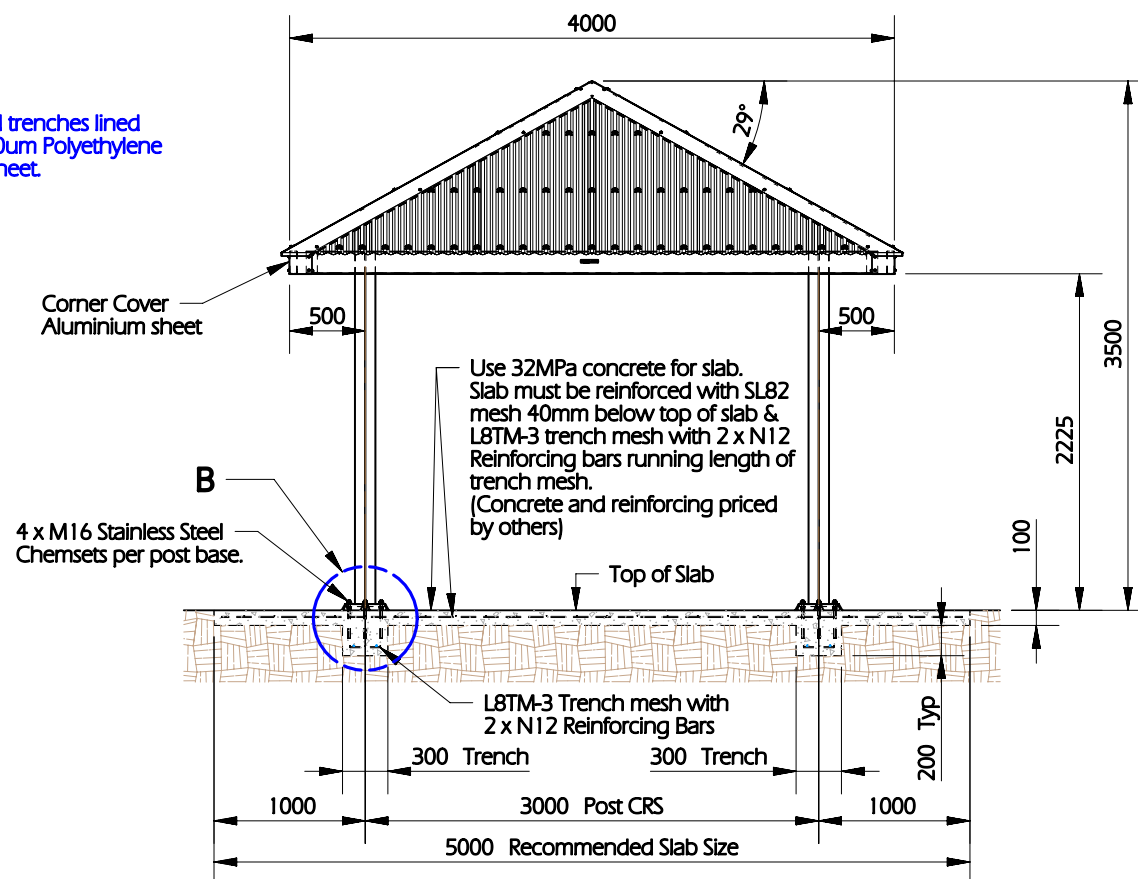

**ELEVATION**  
SCALE 1:50

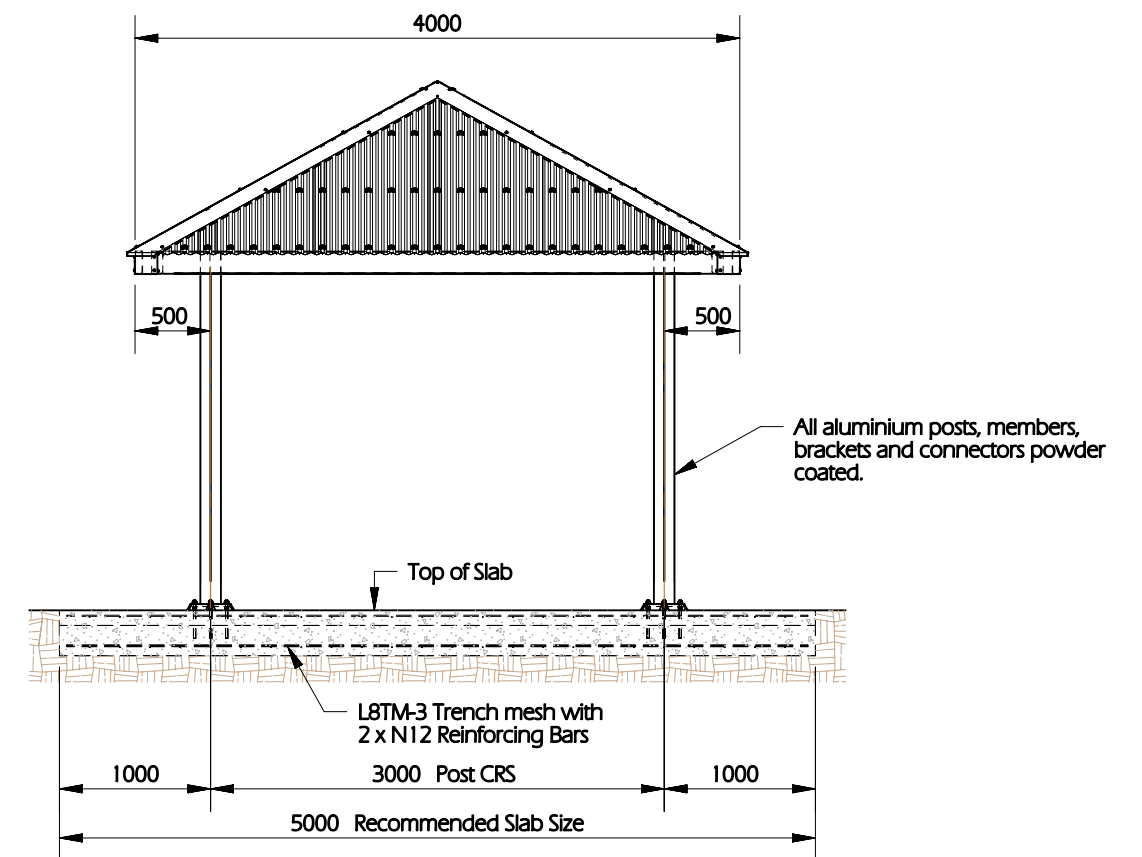

**SIDE VIEW**  
SCALE 1:50

**GENERAL NOTES:**

1. Slab & reinforcing designed for soil Class "P"
2. Slab & trench footings to be lined with 200um Polyethylene (Vinyl) sheet (by others)
3. Compact subgrade to 95% and minimum bearing capacity of 100kPa. Deepen with 15MPa binding concrete if required.